


915nm 160W High Power Fiber Coupled Laser Diode

K915FN1RN-160.0W (Customized Product)

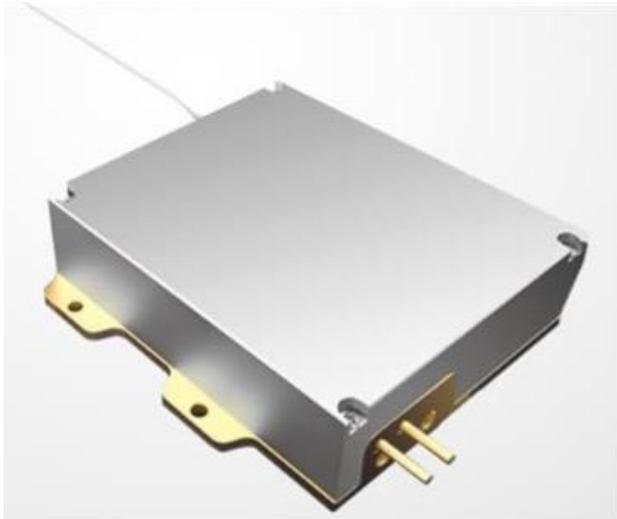

Features:

- 915nm wavelength
- 160W output power
- 106.5 μ m fiber core diameter
- 0.22NA
- 1020nm~1200nm feedback protection

Applications:

- Fiber laser pumping

Specifications (25°C)		Symbol	Unit	K915FN1RN-160.0W		
				Minimum	Typical	Maximum
Optical Data ⁽¹⁾	CW Output Power	P_o	W	160	-	-
	Center Wavelength	λ_c	nm	915 \pm 10		
	Spectral Width (FWHM)	$\Delta\lambda$	nm	6		
	Wavelength Shift with Temperature	$\Delta\lambda/\Delta T$	nm/°C	-	0.3	-
	Wavelength Shift with Current	$\Delta\lambda/\Delta A$	nm/A	-	1	-
	Spot ratio 0.15/0.22	NA	%	-	95	-
Electrical Data	Electrical-to-Optical Efficiency	PE	%	-	44	-
	Operating Current	I_{op}	A	-	-	15
	Threshold Current	I_{th}	A	-	0.6	-
	Operating Voltage	V_{op}	V	-	-	29
	Slope Efficiency	η	W/A	-	12	-
Fiber Data	Core Diameter	D_{core}	μ m	-	106.5	-
	Cladding Diameter	D_{clad}	μ m	-	125	-
	Numerical Aperture	NA	-	-	0.22	-
	Total Fiber Length	L_f	m	-	2.0	-
	Fiber Loose Tubing Diameter	-	mm	0.9mm PTFE		
	Minimum Bending Radius	-	mm	50	-	-
	Fiber termination	-	-	-	None	-
Feedback Isolation	Wavelength Range	λ	nm	1020~1200		
	Isolation	-	dB	-	30	-
Others	ESD	V_{esd}	V	-	-	500
	Storage Temperature ⁽²⁾	T_{st}	°C	-20	-	70
	Lead Soldering Temp	T_{is}	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature ⁽³⁾	T_{op}	°C	15	-	35
	Relative Humidity	RH	%	15	-	75


(1) Data measured under operation output at 160W@25°C.

(2) A non-condensing environment is required for operation and storage.

(3) Operating temperature defined by the package case. Acceptable operating range is 15°C~35°C, but performance may vary.

915nm 160W High Power Fiber Coupled Laser Diode

K915FN1RN-160.0W (Customized Product)

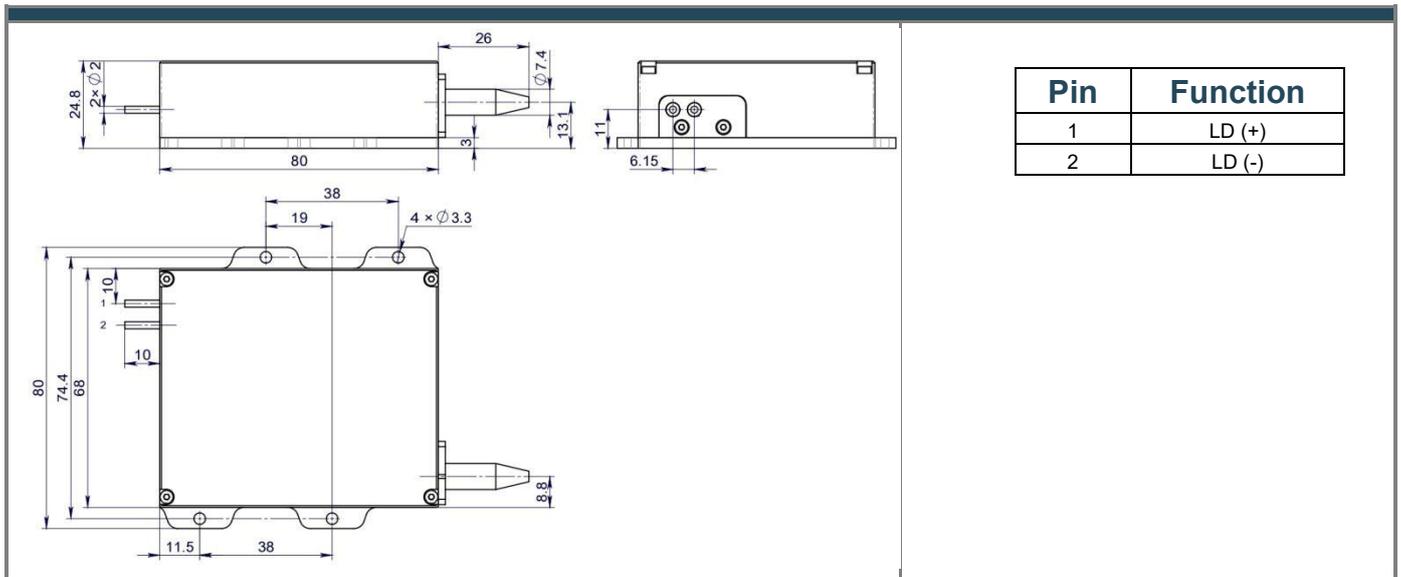

OPERATING NOTES

- Avoid eye and skin exposure to direct radiation during operation.
- ESD precautions must be taken during storage, transportation and operation.
- Short-circuit is required between pins during storage and transportation.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the middle of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- Use constant current power supply to avoid surge current during operation.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- Operation temperature ranges from 15°C to 35°C.
- Storage temperature ranges from -20°C to +70°C.