


## 976nm 600W Wavelength-Stabilized Fiber Coupled Laser Diode

K976BGLRN-600.0WN0N-20022F20EFF (Standard Product)

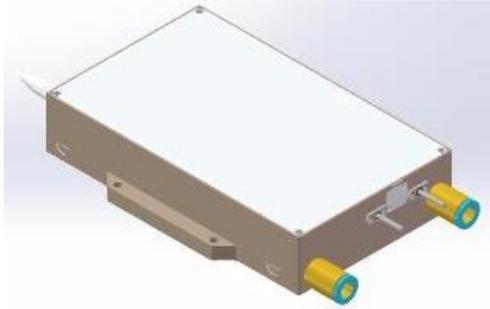

### Features:

- 976±1nm wavelength
- 600W output power
- 200µm fiber core diameter
- 0.22 NA
- 1020nm~1200nm feedback protection

### Applications:

- Fiber Laser Pumping
- Scientific Research

Specifications (20°C 7L/min)		Symbol	Unit	K976BGLRN-600.0W		
				Minimum	Typical	Maximum
Optical Data <sup>(1)</sup>	CW Output Power	P <sub>o</sub>	W	600	-	-
	Center Wavelength	λ <sub>c</sub>	nm	976±1		
	Spectral Width (FWHM)	Δλ	nm	-	0.7	1.0
	Wavelength Shift with Temperature	Δλ/ΔT	nm/°C	-	0.02	-
	Wavelength Shift with Current	Δλ/ΔI	nm/A	-	0.03	-
Electrical Data	Electrical-to-Optical Efficiency	PE	%	-	48	-
	Threshold Current	I <sub>th</sub>	A	-	1.3	-
	Operating Current	I <sub>op</sub>	A	-	23.0	25.0
	Operating Voltage	V <sub>op</sub>	V	-	66.0	70.0
	Slope Efficiency	η	W/A	-	28.0	-
Fiber Data	Core Diameter	D <sub>core</sub>	µm	-	200	-
	Cladding Diameter	D <sub>clad</sub>	µm	-	220	-
	Numeric Aperture	NA	-	-	0.22	-
	Fiber Length	L <sub>f</sub>	m	-	2	-
	Fiber Loose Tubing Diameter	-	mm	0.9		
	Minimum Bending Radius	-	mm	88	-	-
	Fiber Termination	-	-	FC-Ferrule		
Feedback Isolation	Wavelength Range	-	nm	1020~1200		
	Isolation	-	dB	-	30	-
Others	ESD	V <sub>esd</sub>	V	-	-	500
	Storage Temperature <sup>(2)</sup>	T <sub>st</sub>	°C	-20	-	70
	Lead Soldering Temp	T <sub>ls</sub>	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature <sup>(3)</sup>	T <sub>op</sub>	°C	18	20	22
	Relative Humidity	RH	%	15	-	75
	Weight	W	g	600		
	Cooling water flow rate	-	L/min	6	7	8

(1) Data measured under operation at nominal output power@20°C 7L/min.

(2) A non-condensing environment is required for operation and storage.


(3) Operating temperature defined by the package case. Acceptable operating range is 18°C~22°C, but performance may vary.

## 976nm 600W Wavelength-Stabilized Fiber Coupled Laser Diode

K976BGLRN-600.0WN0N-20022F20EFF (Standard Product)

(4) Wavelength-Stabilized: Percentage of power in band of 974.5nm to 977.5nm  $\geq 90\%$ .

### Package Dimensions (mm)

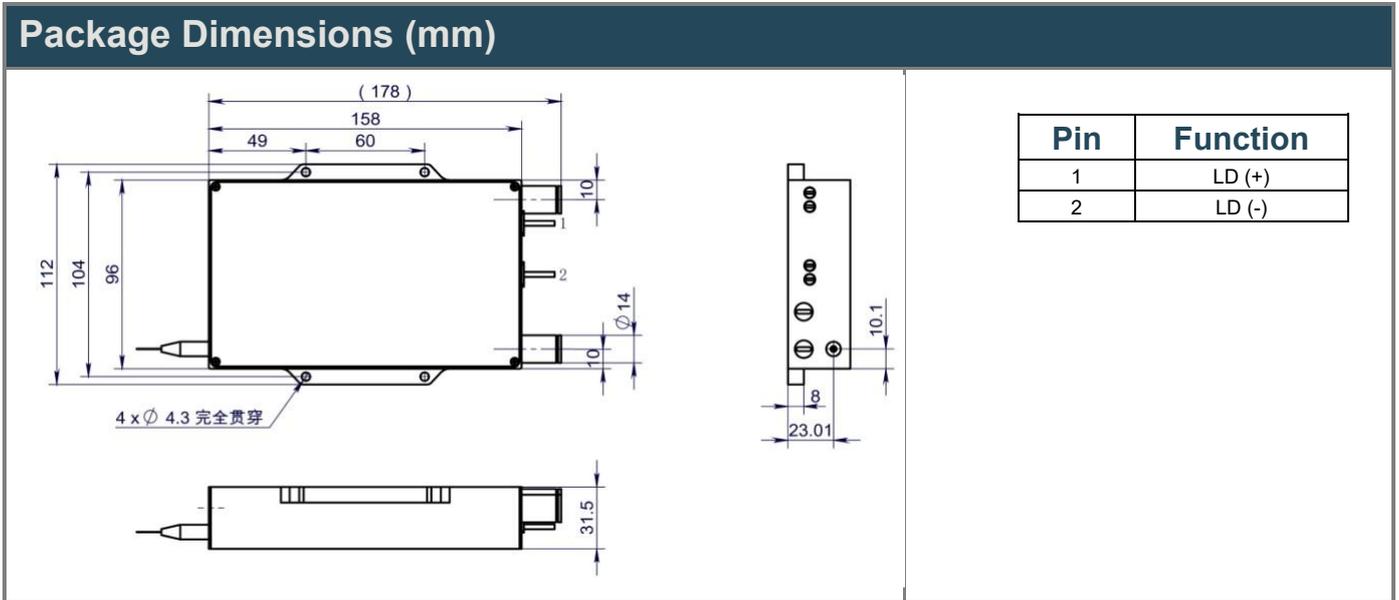

### OPERATING NOTES

- Avoid eye and skin exposure to direct radiation during operation.
- ESD precautions must be taken during storage, transportation and operation.
- Short-circuit is required between pins during storage and transportation.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the middle of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- Use constant current power supply to avoid surge current during operation.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- Operation temperature ranges from 18°C to 22°C.
- Storage temperature ranges from -20°C to +70°C.