


976nm 900W Wavelength-Stabilized Fiber Coupled Laser Diode

K976BGLRN-900.0WN0N-22022F20EFF (Standard Product)

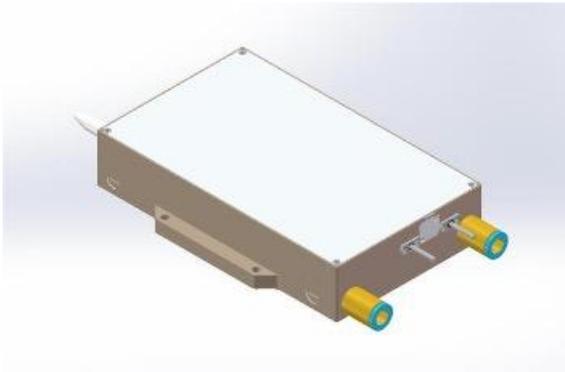

Features:

- 976±1nm wavelength
- 900W output power
- 220µm fiber core diameter
- 0.22 NA
- 1020nm~1200nm feedback protection

Applications:

- Fiber Laser Pumping
- Scientific Research


Specifications (20°C 8.5L/min)		Symbol	Unit	K976BGLRN-900.0W		
				Minimum	Typical	Maximum
Optical Data ⁽¹⁾	CW Output Power	P_o	W	900	-	-
	Center Wavelength	λ_c	nm	976±1		
	Spectral Width (FWHM)	$\Delta\lambda$	nm	-	0.7	1.0
	Wavelength Shift with Temperature	$\Delta\lambda/\Delta T$	nm/°C	-	0.02	-
	Wavelength Shift with Current	$\Delta\lambda/\Delta I$	nm/A	-	0.03	-
Electrical Data	Electrical-to-Optical Efficiency	PE	%	-	48	-
	Threshold Current	I_{th}	A	-	1.3	-
	Operating Current	I_{op}	A	-	30.0	33.0
	Operating Voltage	V_{op}	V	-	70.0	77.0
	Slope Efficiency	η	W/A	-	30.0	-
Fiber Data	Core Diameter	D_{core}	µm	-	220	-
	Cladding Diameter	D_{clad}	µm	-	242	-
	Numeric Aperture	NA	-	-	0.22	-
	Fiber Length	L_f	m	-	2	-
	Fiber Loose Tubing Diameter	-	mm	0.9		
	Minimum Bending Radius	-	mm	96	-	-
	Fiber Termination	-	-	FC-Ferrule		
Feedback Isolation	Wavelength Range	-	nm	1020~1200		
	Isolation	-	dB	-	30	-
Others	ESD	V_{esd}	V	-	-	500
	Storage Temperature ⁽²⁾	T_{st}	°C	-20	-	70
	Lead Soldering Temp	T_{ls}	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature ⁽³⁾	T_{op}	°C	18	20	22
	Relative Humidity	RH	%	15	-	75
	Weight	W	g	600		
	Cooling water flow rate	-	L/min	8	8.5	12

(1) Data measured under operation at nominal output power@20°C 8.5L/min.

976nm 900W Wavelength-Stabilized Fiber Coupled Laser Diode

K976BGLRN-900.0WN0N-22022F20EFF (Standard Product)

Package Dimensions (mm)

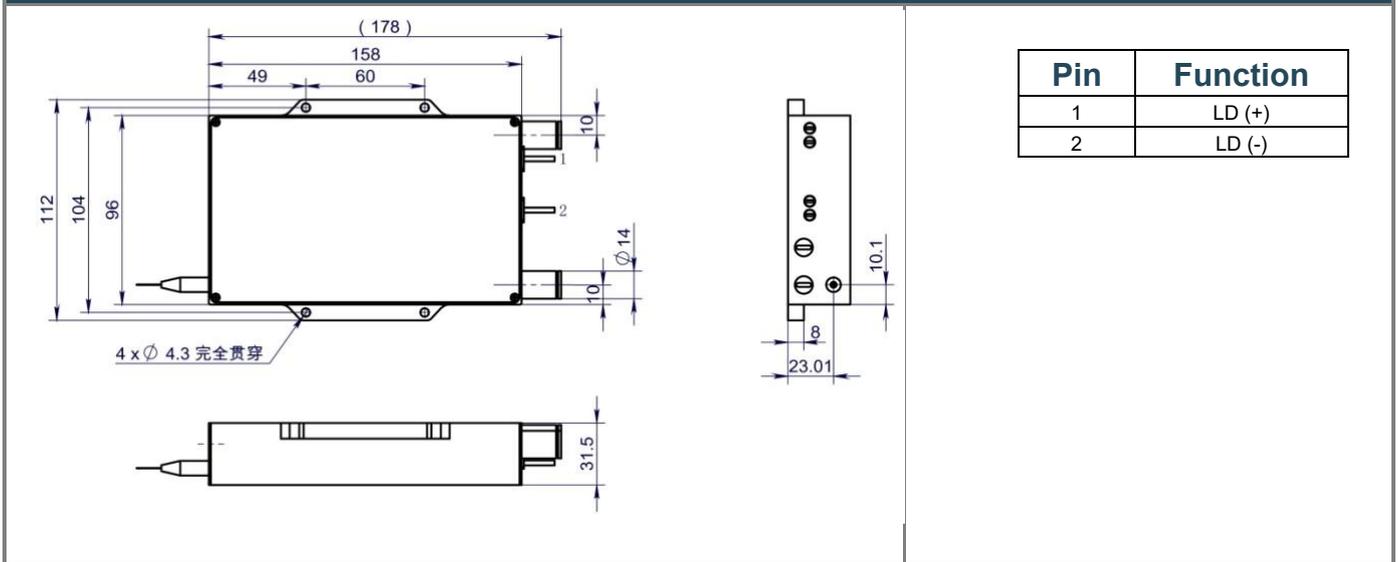

OPERATING NOTES

- Avoid eye and skin exposure to direct radiation during operation.
- ESD precautions must be taken during storage, transportation and operation.
- Short-circuit is required between pins during storage and transportation.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the middle of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- Laser diode must work with good cooling.
- Operation temperature ranges from 18°C to 22°C.
- Storage temperature ranges from -20°C to +70°C.